



2322600403_Split Phase Bus Cable(10AWG,TC,2.4m)

RoHS

CHANGE NO.	CHANGE CONTENTS	REV.	NAME/DATE
①	Update number of connectors	0.1	YFT 2021-9-24
②	Update dimensions; Update electrical parameters	0.2	YFT 2022-4-15
③	Update part name	0.3	YFT 2022-6-13
④	Update electrical parameters	0.4	YFT 2022-6-30

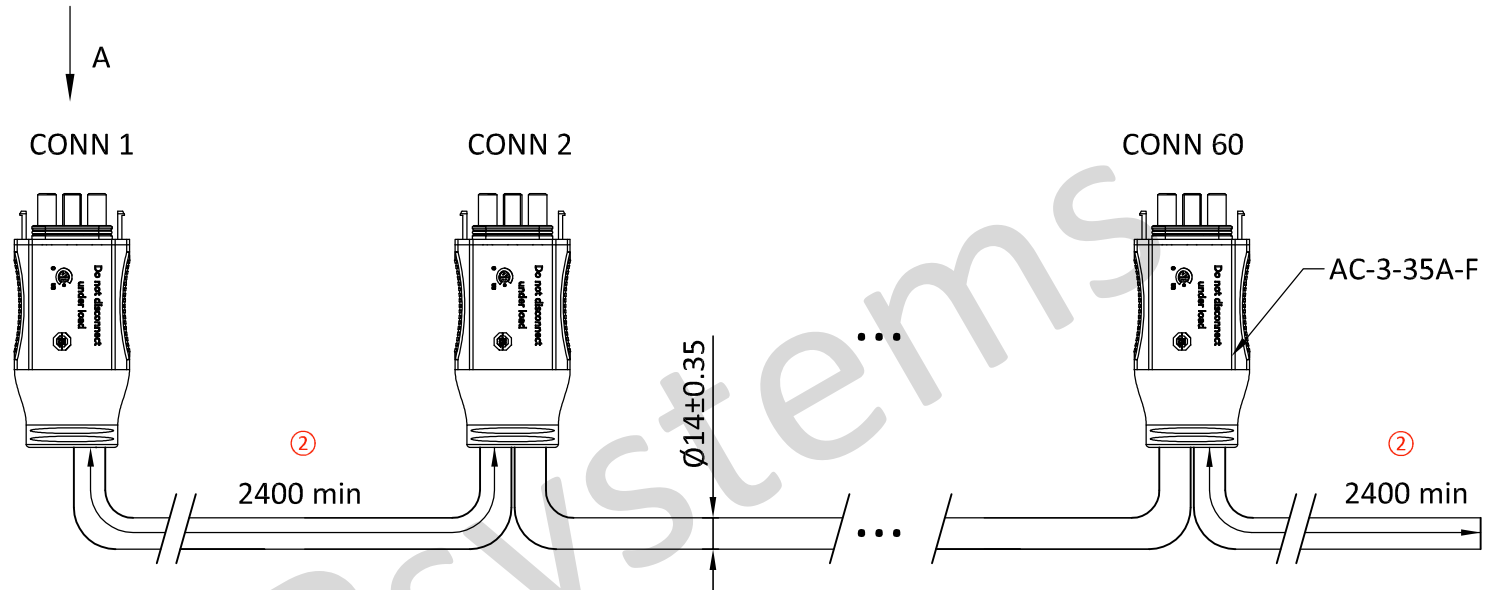

VIEW A



Notes:

1. Cable marking: E489601 (UL)TYPE TC-ER 3C/10AWG 90°C WET OR DRY 600V
--- c(UL) TYPE CIC 90°C 600V FT1 XLPE 3C/10AWG FT4 DIR BUR SUN RES COLD BEND HWATEK CE
2. Waterproof rating: IP67
- ① 3. A series of bus cable contains 60 connectors, each connector spacing is 2400mm
4. Wiring: BLACK-L1, RED-L2, GREEN-PE
- ② ④ 5. Electrical parameters:
Working voltage rating: 600V
Working current rating cable 35A
Resistance voltage: AC 2500V 50mA 1 Minute
Conductor resistance: 3.409Ω/km
6. Use blank cartons for packaging

TOLERANCES UNLESS OTHERWISE SPECIFIED	
>0-100 ±5	>2500-3500 ±45
>100-500 ±10	>3500-4500 ±50
>500-900 ±15	>4500-5500 ±65
>900-1300 ±25	>5500-6500 ±80
>1300-1800 ±30	>6500-8000 ±90
>1800-2500 ±35	>8000-10000 ±100

MATERIAL



NAME
Split Phase Bus Cable (10AWG,TC,2.4m) ③

DRAWING NO.

DWN.	UNIT mm		
CHK.	SHEET --	OF --	REV. 0.4